


APPROVED FOR PUBLIC RELEASE
DISTRIBUTION IS UNLIMITED.

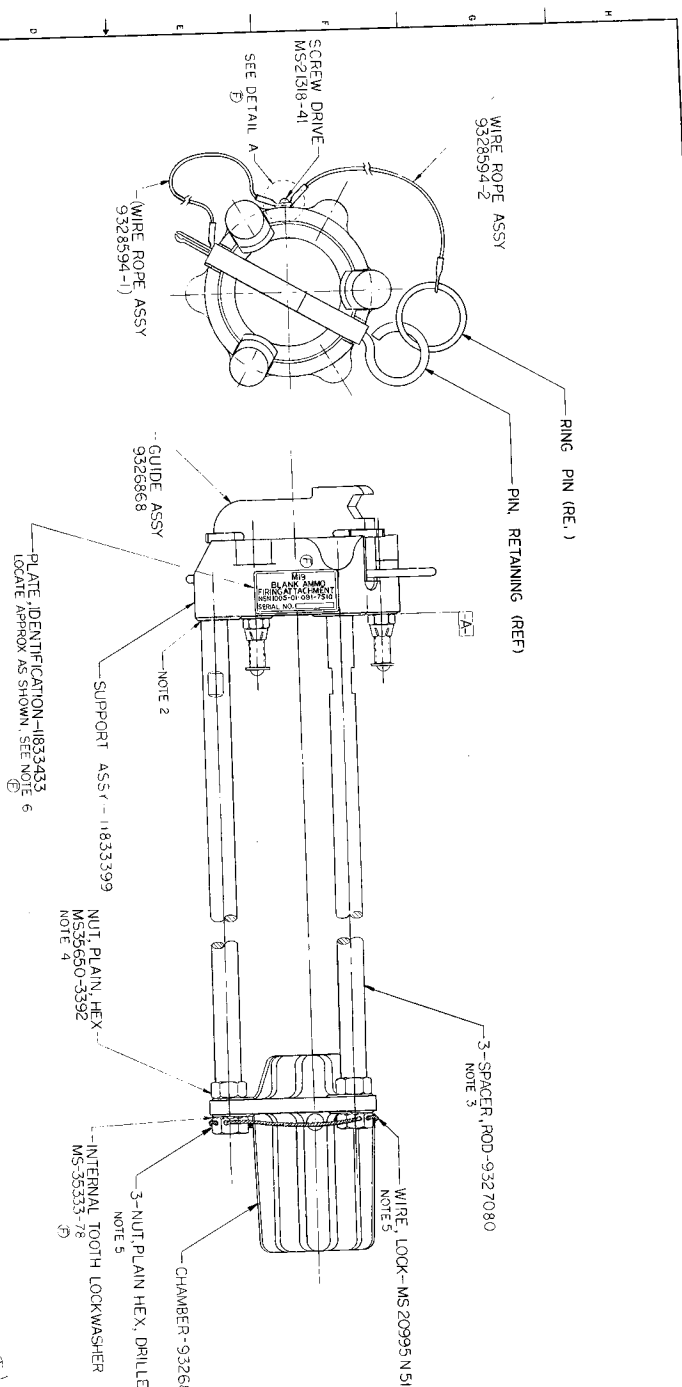

- NOTE: 1. SERIAL NUMBERS ARENVA 5-937080 TO MULT-6 (6337) APPLIED TO THE SERIAL NUMBER 5-937080 TO SUPPORT A55, 18-2273, AND TIGHTEN SEALING COMPOND, ALAERBOL, GRADE A, M/L 5-2273, AND TIGHTEN MACHIN COMPOND 9327080 TO BE PERPENDICULAR TO DRAW (A-3)
2. (MULTIN 030 AFTER TIGHTENING.
3. ASSEMBLY 3) HEX NUT M533660-3092 TO (3) SPACER ROD 9327080 USING SEALING COMPOND AND ANAERBOL LOCKWIRE IN ACCORDANCE WITH M5-3340-40.
4. GENERAL PRACTICES FOR SAFETY WARNING-1833433, BEFORE ATTACHING SERIAL NUMBER ON PLATE, WHICH CONSIST OF MANUFACTURER'S MARKING, PLATING NUMBER FOLLOWED BY DASH AND FOUR DIGIT NUMBER STARTING WITH 0001 AND FINISHING CONSECUTIVELY THROUGHOUT PRODUCTION (EXAMPLE: 0001).

DETAIL A
SCALE: 4/1

PART NO. 9324931

REVIEWS		DATE	APPROVAL
7/1	78-7-1		
A	REVIEWED	78-0908	
B	REVIEWED	78-01-3	
C	REVIEWED	79-09-26	
D	REVIEWED	79-09-19	
PRODUCTION RELEASE			
E	ERR 995 2512		
F	NOR W052505 80-11-2	80-11-26	
G	NOR 625945/320626	920905	

[illegible]

CHAMBER
GUIDE ASSEMBLY
SPACER ROD
MIRE ROPE ASSY
MIRE ROPE ASSY
SUPPORT ASSY
PLATE, IDENTIFICATION
SEALING COMPOUND, GRADE A
NUT, PLAIN, HEX-DRILLED, AMS 6322, CADMIUM PLATE
WIRE, SAFETY OR LOCK
SCREW, DRIVE, ROUND HD, TYPE Y, STLCARBON, CAD PLT
SAFETY WINDING AND COTTER PINNING, GENERAL PRACTICE FOR
WASHER, LOCK, FLAT-INTERNAL TIGHT
NUT, PLAIN-HEXAGON, MACHINE SCREW, UNF-2B