
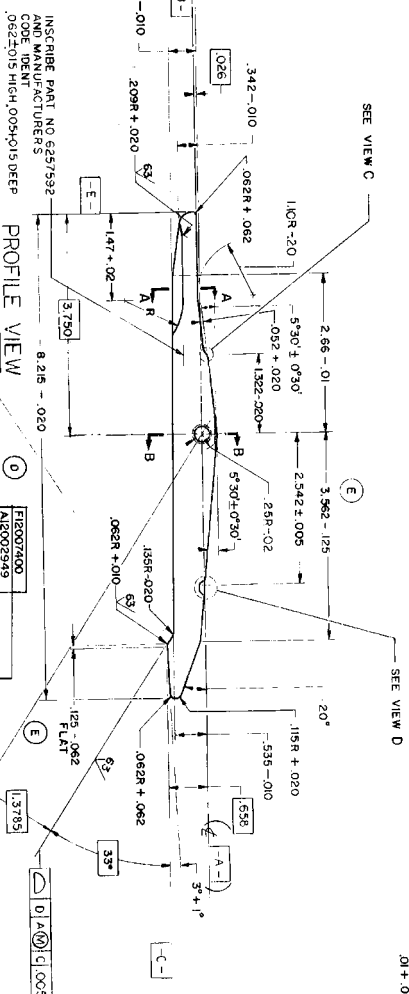
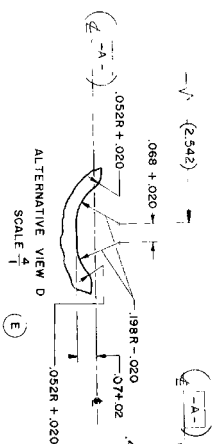




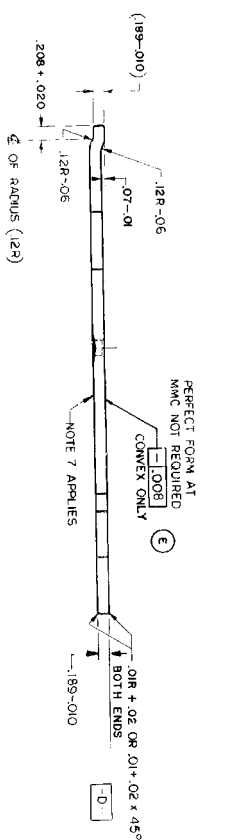


- NOTES: 1. FINISH 125° EXCEPT AS NOTED. SHEARED EDGES 250°.
2. BREAK EDGES .003 ± .012 UNLESS OTHERWISE SPECIFIED.
3. MATERIAL: STEEL, SPEC QQ-S-700, 1055, 1065 OR ASTM A351, A150.
4. HEAT TREATMENT: LOCALLY HARDEN FOR A DISTANCE OF 1250 ± 125. QUENCH AND TEMPER PER MIL-H-6875 TO HARDNESS SPECIFIED.
5. FINAL PROTECTIVE FINISH: FINISH 5.3, 5.2 OR 5.3.2.2 OF MIL-S-171.
6. MIL-W-13805 APPLIES. (E)
7. DOES MAX DIELOIL PERMISSIBLE BETWEEN SPECIFIED SURFACE AND PROFILE SURFACES OF STAMPED PARTS.
8. ALL UNSPECIFIED EDGES IN PROFILE VIEW .03R MAX.

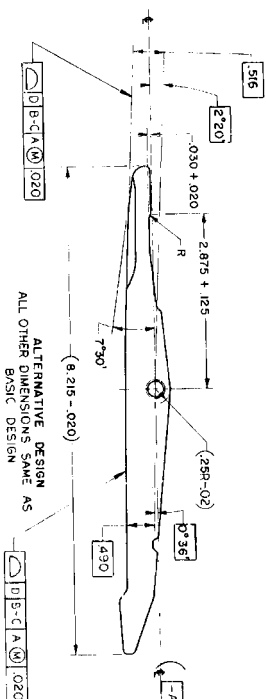

REGIONS		DATE	REMOVED
121	REGIMEN WITH CHANGE	17 Feb 67	<i>William</i>
A	SEE EO 14, 23, 35		
B	1) SEE EO HORN 00175	14 MAY 67	<i>William</i>
C	2) SEE EHR HORN 22008-1	14 MAY 67	<i>William</i>
D	3) SEE EHR HORN 30677	28 MAR 67	<i>William</i>
E	4) SEE EHR HORN 40639	18 FEB 67	<i>William</i>
F	5) SEE EHR HORN 50685	1 OCT 67	<i>William</i>
G	6) NOW 55, 3005	77-03-01	<i>William</i>
H	ERP 232227AC		
I	ERP 23220111 (870413)	891215	<i>William</i>
J	KEP 6520204, 91-01-041	91-04-08	<i>William</i>
K	NOR 6433446 95018	960315	<i>William</i>

[illegible]

DISTRIBUTION STATEMENT A.
APPROVED FOR PUBLIC RELEASE,
DISTRIBUTION IS UNLIMITED.

SMESP FORM NO. 1178.1
20 MAR 64 REV.